


Auto Start

Bee Bee digital voltage sensing single phasing preventer with auto start (often called as auto switch) helps you to protect and prevent running your motor / pump (or any 3 phase load) from various circumstances including any phase failure, under voltage, phase imbalance and allows to run your motor / pump automatically without any manual intervention when it meets all the recommended voltage levels.

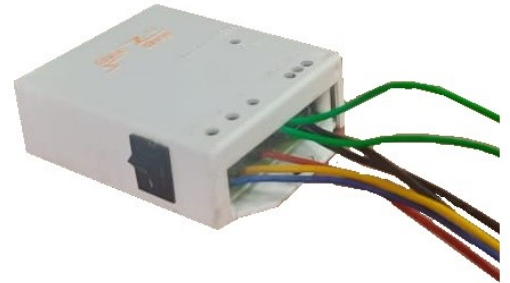

It's Protects Motor From

- Phase Loss Conditions.
- Phase Imbalance conditions
- Over Voltage Conditions.
- Under voltage condition.

Applicable at

Three Phase Motor at Power distribution Panel, Machine tools, Irrigation Pumps, Control Panel, Monitor main input supply for monitoring controls etc.

Suitable for

- Any H.P. of Motor
- Automatic Reset.
- Suitable for any 3 phase DOL, Star Delta Starter, ACB, OCB, Contactors etc
- High class Engineering ABS enclosure.
- Compact, Lightweight and
- Easy to Install.

Technical Specifications

System Supply Voltage	415/440 VAC @ 50Hz
Output	1 c/o, 7A @ 230VAC (resistive)
Unbalance Voltage	30V ± 6V (fixed)
Trip time delay	1 to 5 Sec.
Resetting mode	Auto reset
Indications	Power ON
Mounting	Wall Mounting
Dimensions in mm	60(W) x 70(H) x 110(D)
Weight	440 gms
Enclosure	Virgin Plastic ABS

IF PLR DOESNOT WORK PROPERLY SHORT C & NO

